


DuraVane
Lubricated rotary vane pump
RVL700HH/LH

DuraVane lubricated rotary vane pumps are single-stage pumps with an integrated closed loop oil recirculation system.


- Heavy duty construction.
- Compact design, small footprint.
- High-tech vane material provides long vane life.
- Low noise level.
- Low maintenance.
- Air-cooled design.
- Internally mounted inlet check valve and filter.
- High efficiency multi-stage exhaust filter removes 99.9% of exhaust smoke.
- Direct drive.
- Simple to install.

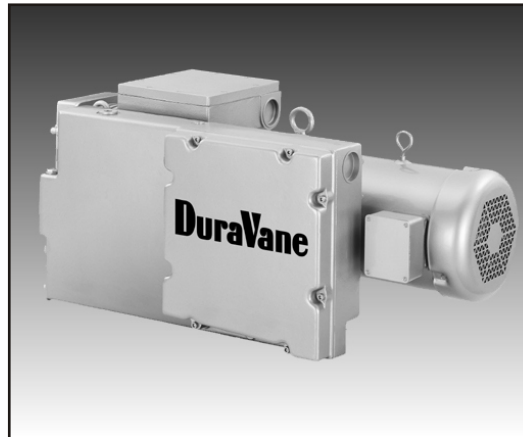

Performance characteristics

Displacement:	710CFM
Final pressure:	0.5/15Torr
Motor:	40HP/60HzTEFC
Voltage:	230/460V/3phase
Speed:	1200RPM
Noise level(at 3ft):	81dBA
Oil reservoir cap.:	18qt
Oil type:	Duratex 100
Weight:	2100Lbs
Inlet conn.:	4"NPT
Discharge conn.:	3"NPT

*For continuous operation from 300-0.5Torr select RVL700HH.
For continuous operation from 500-15Torr select RVL700HL.*

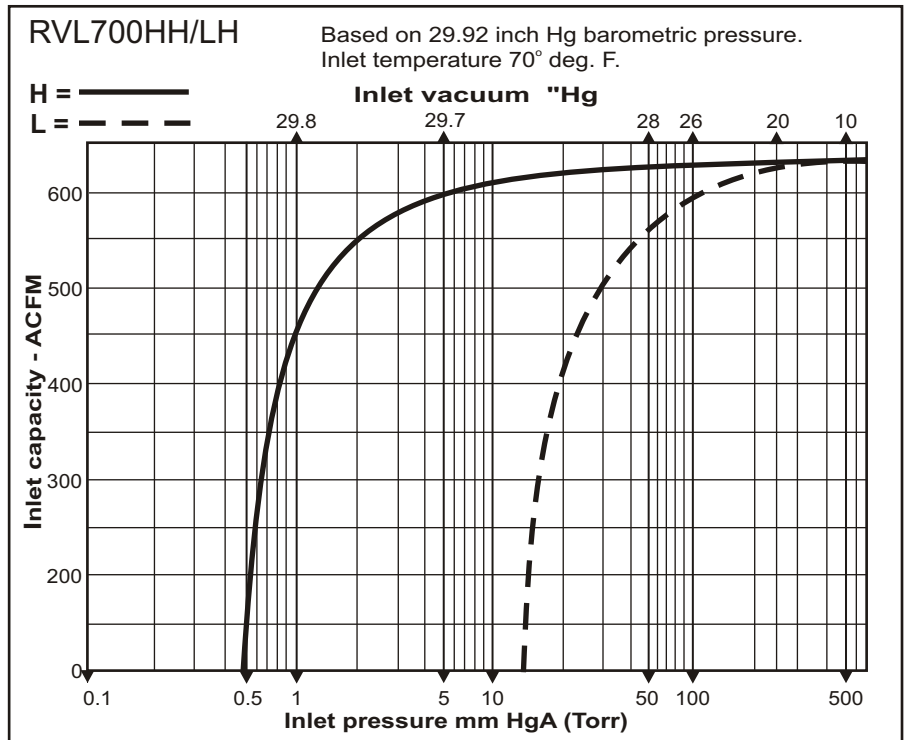

RVL700HH/LH

CONTACT FACTORY

Information contained in this document is for reference only. Subject to change without notice.